

ADJ & I/O INSTRUCTION BANK PANIC

OPTION SWITCH SETTING


OPTION	1	2	3	4	5	6	7	8	
1 COIN 1 CREDIT	OFF	OFF							COIN SW 1
1 COIN 2 CREDITS	ON	OFF							
2 COINS 1 CREDIT	OFF	ON							
3 COINS 1 CREDIT	ON	ON							
1 COIN 1 CREDIT			OFF						COIN SW 2
2 COINS 1 CREDIT			ON						
PLAYER 3				OFF					
4				ON					
EXTRA	70000, 200000, 500000				OFF				
PLAYER	100000, 400000, 800000				ON				
GAME EASY						OFF			
DIFFICULTY HARD						ON			
ADVERTISE OFF							OFF		
SOUND ON							ON		
TABLE TYPE								OFF	
UPRIGHT TYPE								ON	



834-5522

I/O INSTRUCTION

COMPONENT SIDE	No.	No.	SOLDER SIDE
GND	A	1	GND
GND	B	2	GND
COIN SW2	C	3	GND (ONLY EXPORT)
1P RIGHT DOOR	D	4	2P RIGHT DOOR
1P CENTER DOOR	E	5	2P CENTER DOOR
	F	6	
1P START	H	7	2P START
1P LEFT DOOR	J	8	2P LEFT DOOR
	K	9	
	L	10	
1P LEFT	M	11	2P LEFT
1P RIGHT	N	12	2P RIGHT
COIN COUNTER 1	P	13	COIN SW 1
COIN COUNTER 2	R	14	SERVICE SW
RED	S	15	GREEN
BLUE	T	16	CMP SYNC
	U	17	
+ 5V	V	18	+ 5V
+ 5V	W	19	+ 5V
+ 12V	X	20	+ 12V
SPEAKER 1	Y	21	SPEAKER 2
SPEAKER GND	Z	22	SPEAKER GND

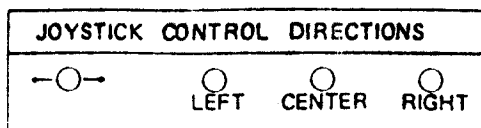

421-5677